


TITAN



BVCert. 6037554

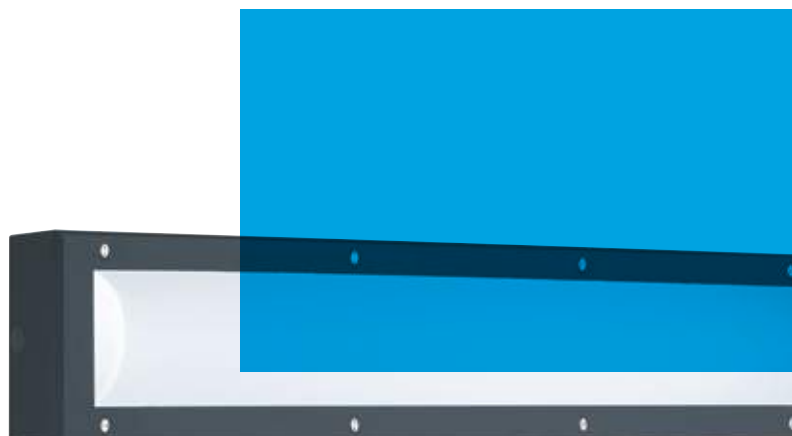

A range of elegant technical luminaires designed to withstand extreme vandalism in public spaces.

More light, less maintenance: the Titan is the long-life lighting solution that project owners and users of public spaces alike will find re-assuring!


Longer life

With LEDs and professional power supplies designed to last 50,000 hours.

Greater savings

Thanks to the LED fittings and lighting management systems: detection, dimming, etc.

- 1 Braced polycarbonate diffuser
- 2 Steel frame and base treated against corrosion, 2 mm thick
- 3 Seal compression chamber
- 4 Lip to prevent forced entry
- 5 Sliding, plug-in reflector gear tray
- 6 Anti-vibration pads
- 7 Supplied c/w sealing washers

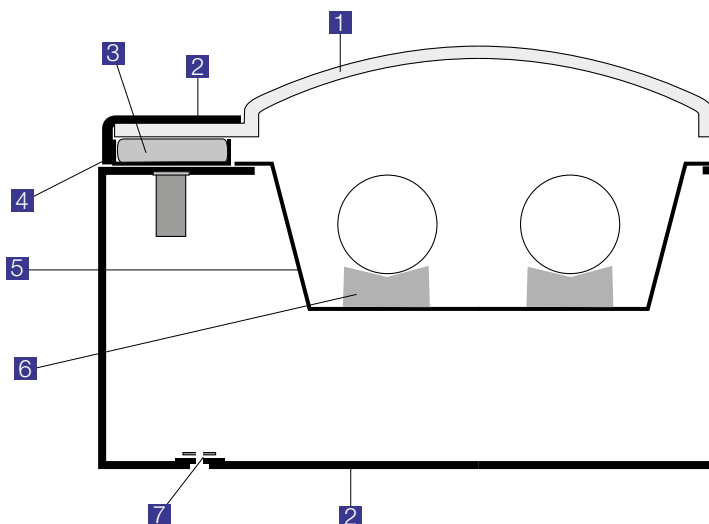




Malux

TITAN
COMPACT




Malux

A highly-compact architectural LED luminaire for circulation areas and public spaces subject to vandalism.

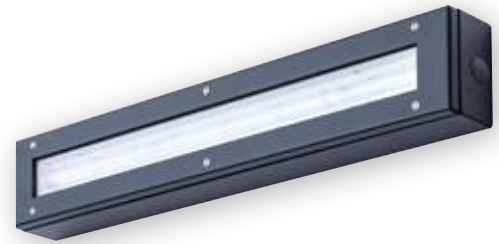

Features:



- Luminaire withstands extreme vandalism
- Wall or corner mounting versions body and frame in ZP steel
- Flush-mounting version on request: body and frame in painted 304L stainless steel
- Polyester powder-coated finish
- Flat opal polycarbonate diffuser
- Stainless steel vandal-resistant screws
- Wall- and corner-mounting versions supplied c/w nickel-plated brass cable gland
- Flush-mounting version supplied c/w IP66 cable seal

■ RAL7016

Options available on request:


- 3000 K LEDs
- 316L stainless steel version (wall and corner fittings)
- Light-control optics version

🔧 Vandal-resistant tool (bit) to be ordered separately
code: 9800 0003




NEW!
Flush version in Stainless steel
See page 140


Titan Compact Wall
code: 6401 1400

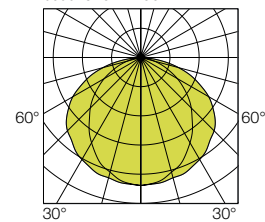


Titan Compact Flush
(on request)

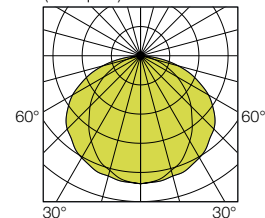

Titan Compact Angle
code: 6411 1400

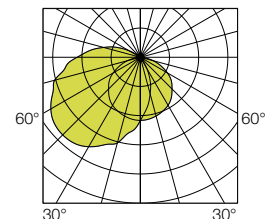




TITAN COMPACT Wall mounted

direct 640

220-240 V AC / 50/60 Hz RoHS

| Number of LLC 1300 modules | Length (mm) | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm/W) | CCT (K) (CRI min.) | Code |
|----------------------------|-------------|-----------|-----------------------------|---------------------------|--------------------|------------------|
| 1 | 375 | 16 | 730 | 46 | 4000 (80) | 6401 1400 |
| 2 | 660 | 27 | 1295 | 48 | 4000 (80) | 6402 1400 |
| 3 | 945 | 36 | 1830 | 51 | 4000 (80) | 6403 1400 |
| 4 | 1230 | 56 | 2700 | 48 | 4000 (80) | 6404 1400 |




TITAN COMPACT Angle

direct 641

220-240 V AC / 50/60 Hz RoHS

| Number of LLC 1300 modules | Length (mm) | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm/W) | CCT (K) (CRI min.) | Code |
|----------------------------|-------------|-----------|-----------------------------|---------------------------|--------------------|------------------|
| 1 | 375 | 16 | 730 | 46 | 4000 (80) | 6411 1400 |
| 2 | 660 | 27 | 1295 | 48 | 4000 (80) | 6412 1400 |
| 3 | 945 | 36 | 1830 | 51 | 4000 (80) | 6413 1400 |
| 4 | 1230 | 56 | 2700 | 48 | 4000 (80) | 6414 1400 |

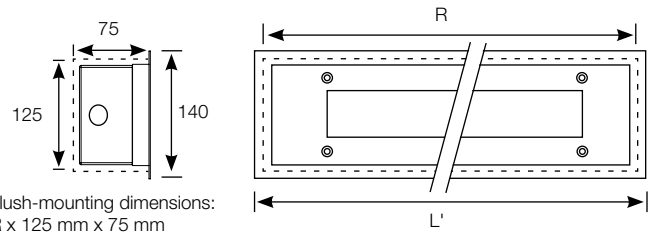

TITAN COMPACT E (on request)

i direct 642

220-240 V AC / 50/60 Hz RoHS

| Number of LLC 1300 modules | Aperture length R (mm) | Frame length L' (mm) | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm/W) | CCT (K) (CRI min.) | Code |
|----------------------------|------------------------|----------------------|-----------|-----------------------------|---------------------------|--------------------|----------------|
| 1 | 390 | 405 | 16 | 730 | 46 | 4000 (80) | on req. |
| 2 | 675 | 690 | 27 | 1295 | 48 | 4000 (80) | on req. |
| 3 | 960 | 975 | 36 | 1830 | 51 | 4000 (80) | on req. |
| 4 | 1245 | 1260 | 56 | 2700 | 48 | 4000 (80) | on req. |

Additional options Titan Compact

Coding:

add the corresponding suffix to the product code: e.g. **6401 1400** -----

- 9413** Flat Duroflam® diffuser
- 9601** Anti-graffiti protection
- 9702** stainless steel crosspoint screws (VK54)

N.B.: through wiring possible on standard codes by piggy-backing on gear tray supply terminal block



60° LED optics



90° LED optics

LED optics version on request



