


Example 1

If the power supply can't be done in a groove (general application) there's the possibility to mount it in a duct next to it (OKK-canal for example). Therefore the MarkLED will be mounted with a connection cable. The current supply is provided in the duct, over a cross connection to the junction box, Vergussmuffe or with a customary flat cable adapter.




Item no. 144378

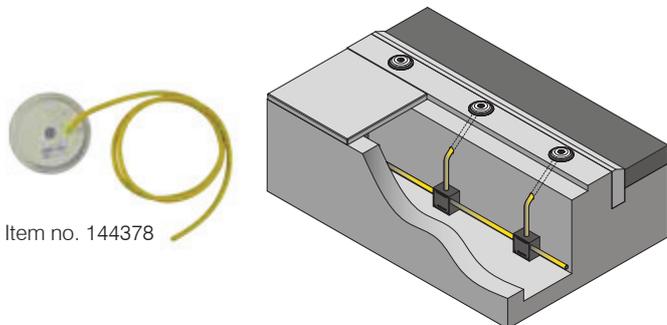


Tunnel Limfjord Denmark

Example 2

With the recessed mounted box for MarkLED we can offer a robust and easy solution for a recessed installation of MarkLED. On both sides with hose connections M25 for installation conduits.


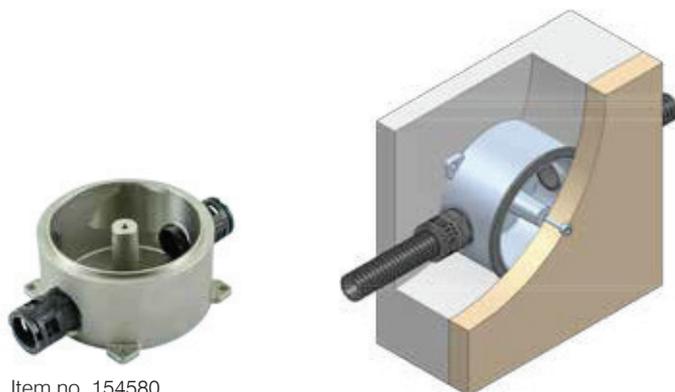


Item no. 154580

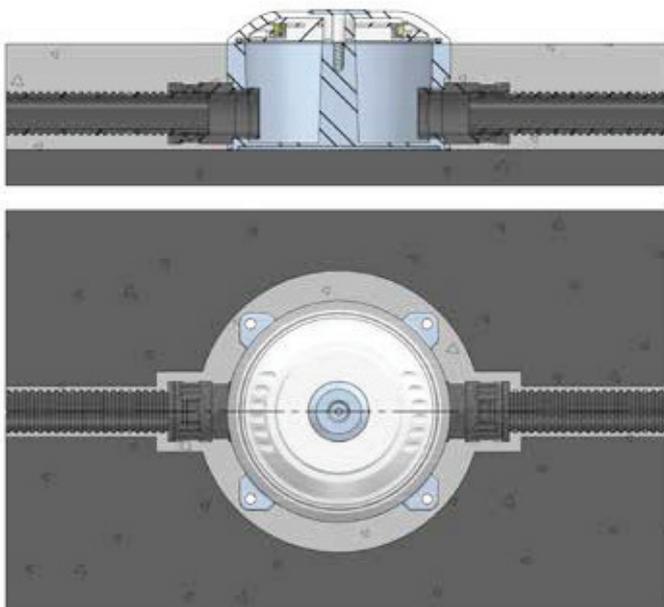

Example 3

If the MarkLED has to be mounted for example on a New Jersey-profile then there should be made a cross drill through the profile. On the backside a junction box can be set or inserted directly in a existing cable tray.

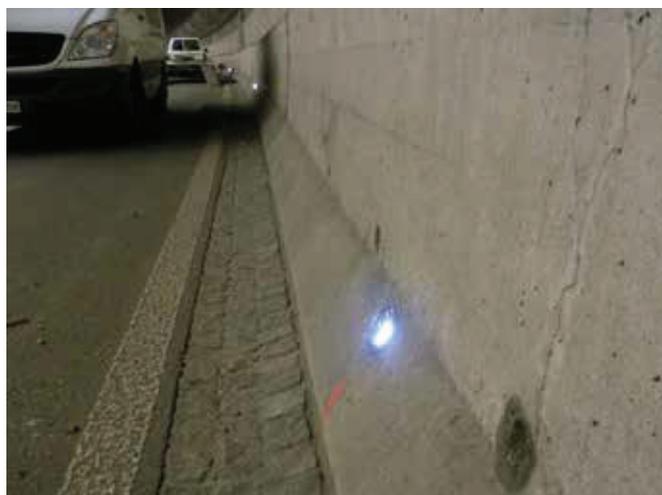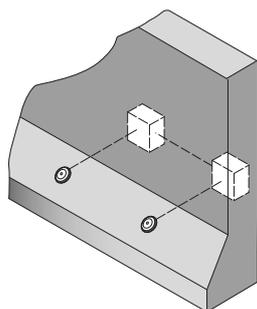

Tunnel Stephanshorn St. Gall