



Y/D-STARTER

Zoner:

0	1	2	20	21	22
---	---	---	----	----	----

Ex II 2 G Ex II 2 D Ex de IIC T4-T6, IP66 -55°C...+55°C						PTB 99 ATEX 1044
Art. nr	Ex-KO	Storlek mm	Förskruvning	Effekt kW	Vikt kg	Material
51316X	208900 C0001	271x544x136	4xM25	4		Glasfiberförstärkt polyester
51317X	208900 C0002	271x544x136		5,5		
51318X	208900 C0003	271x544x136		7,5		
51319X	208900 C0004	271x817x271	1xM32 3xM25	11		

X=Överströmsskydd, måste anges.

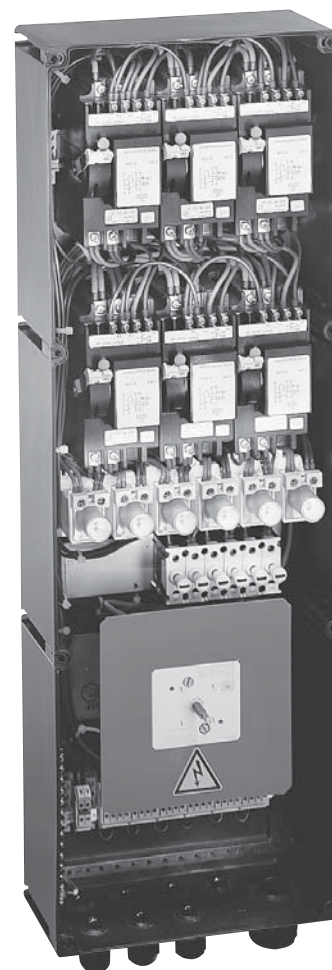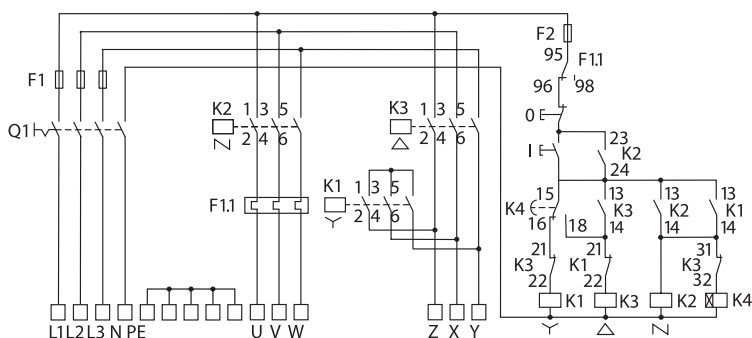

Val av motorskydd och försäkring

Inställnings- område	230V AC		400V AC		500V AC		690V AC		Temp. klass						
	lcs kA	gl, aM A	lcs kA	gl, aM A	lcs kA	gl, aM A	lcs kA	gl, aM A							
0,1...0,16A	Kortslutningssäker försäkring krävs ej								T6						
1,0...1,6A									T6						
1,6...2,5A									40	25	T6				
2,5...4,0A									40	35/40	10	40	T6		
4,0...6,3A									30	50	3	40	T6		
6,3...9,0A									30	80	3	50	T6		
9,0...12,5A									50	80	20	80	3	50	T6
12,5...16,0A									50	100	20	100	3	50	T5
16,0...20,0A	50	100	20	100	2	50	T5								
20,0...25,0A	50	125	50	125	20	125	2	50	T5						
	Erforderlig försäkring														