

Physikalisch-Technische Bundesanstalt

Braunschweig und Berlin



(1) **EC-TYPE-EXAMINATION CERTIFICATE** (Translation)

(2) Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres - **Directive 94/9/EC**



(3) EC-type-examination Certificate Number:

PTB 99 ATEX 1041

(4) Equipment: Plug-and socket device type GHG 512 R....

(5) Manufacturer: CEAG Sicherheitstechnik GmbH

(6) Address: D-69412 Eberbach

(7) This equipment and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.

(8) The Physikalisch-Technische Bundesanstalt, notified body No. 0102 in accordance with Article 9 of the Council Directive 94/9/EC of 23 March 1994, certifies that this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmospheres, given in Annex II to the Directive.

The examination and test results are recorded in the confidential report PTB Ex 99-19042.

(9) Compliance with the Essential Health and Safety Requirements has been assured by compliance with:

EN 50014:1997

EN 50018:1994

EN 50019:1994

(10) If the sign "X" is placed after the certificate number, it indicates that the equipment is subject to special conditions for safe use specified in the schedule to this certificate.

(11) This EC-type-examination Certificate relates only to the design and construction of the specified equipment in accordance with Directive 94/9/EC. Further requirements of this Directive apply to the manufacture and supply of this equipment.

(12) The marking of the equipment shall include the following:



II 2 G EEx ed IIC T6 resp. T5

Zertifizierungsstelle Explosionsschutz

Braunschweig, September 01, 1999

By order:

Dr.-Ing. U. Klausmeyer
Regierungsdirektor



sheet 1/3

EC-type-examination Certificates without signature and official stamp shall not be valid. The certificates may be circulated only without alteration. Extracts or alterations are subject to approval by the Physikalisch-Technische Bundesanstalt. In case of dispute, the German text shall prevail.

Physikalisch-Technische Bundesanstalt

Braunschweig und Berlin

(13)

SCHEDULE

(14)

EC-TYPE-EXAMINATION CERTIFICATE PTB 99 ATEX 1041

(15) Description of equipment

The type GHG 512 ... R ... plug-and-socket device serves to connect portable electrical apparatus or to make connections in potentially explosive atmospheres.

The following variants are permissible: transformer plugs (isolating transformer, class of protection II) and an auxiliary or control contact in a wall-mounting socket-outlet.

Staggered grooves guarantee that only plugs or socket outlets of identical rated voltage will be used together. Mechanical marking ensures that the plugs of the type GHG 532... V ... plug-and-socket device (Certificate of Conformity PTB No. Ex-85.B.1066) can be used for the wall-mounting socket-outlet and in the coupling.

Electrical data

Rated voltage	up to	750	V
Rated current.....	max.	32	A
Utilization category		AC-3	

Transformer plug

Rated voltage, primary.....	up to	250	V
Rated voltage, secondary	up to	42	V
Power consumption	max.	65	VA
Miniature fuse.....		0.5	A
Temperature class.....		T 5	

In accordance with the relevant provisions, rated values other than those stated above are permissible, provided the making and breaking capacity is complied with. They have been specified by the manufacturer, dependent on the mode of operation, utilization category etc.

Nominal frequency.....	up to	400	Hz
Rated cross-section			
Plug.....	max.	2.5	mm ²
Coupling.....	max.	4	mm ²
Wall-mounting socket-outlet	max.	4	mm ²
Main terminals.....	max.	10	mm ²
Auxiliary terminals	max.	2,5	mm ²

(16) Report PTB Ex 99-19042, description (8 sheets), Annex to the description (11 sheets), 14 drawings

sheet 2/3

Physikalisch-Technische Bundesanstalt

Braunschweig und Berlin

SCHEDULE TO EC-TYPE-EXAMINATION CERTIFICATE PTB 99 ATEX 1041

(17) Special conditions for safe use

not applicable


(18) Essential health and safety requirements

The tests carried out and their positive results show that the plug-and-socket device meets the requirements of Directive 94/9/EC and of the standards stated on the cover sheet.

Zertifizierungsstelle Explosionsschutz

Braunschweig, September 01, 1999

By order:

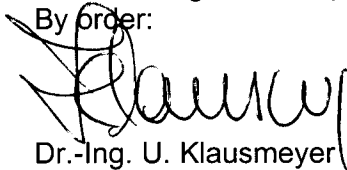

Dr.-Ing. U. Klausmeyer
Regierungsrat



1st SUPPLEMENT

according to Directive 94/9/EC Annex III.6

to EC-TYPE-EXAMINATION CERTIFICATE PTB 99 ATEX 1041

(Translation)

Equipment: Plug-and-socket device, type GHG 512R.....

Marking:  II 2 G EEx de IIC T6 or T5

Manufacturer: CEAG SicherheitstechnikGmbH

Address: Neuer Weg Nord 49
69412 Eberbach, Germany

Description of supplements and modifications

The wall-mounting socket outlet of type GHG 512 .4.. R.... may also be provided with an auxiliary switch for operation with an intrinsically safe circuit.

Intrinsically safe auxiliary circuit

Connection to terminals 3(11), 4(12), and 1 for intrinsically safe circuits EEx [ia] IIC T6 or T5

Only for connection to certified intrinsically safe circuits.

When using the intrinsically safe auxiliary circuit, the type of protection symbol will change to:

EEx de [ia] IIC T6 or T5

Auxiliary contacts of type of protection Intrinsic Safety "i"

The flush-mounting switches shall be installed in the enclosure in such a way that the clearance and creepage distances required under EN 50020 between intrinsically safe and non-intrinsically safe circuits are duly considered.

If system installation and layout does not provide for the clearance requirements for connectors as specified in EN 50020, wiring that meets the quality criteria Increased Safety "e" shall be used, or the wiring shall be mechanically fail-safe in accordance with EN 50020.

Should the above clearance requirements not be met, local wiring measures will be accepted only, if an explosion risk can positively be excluded along all the lines.

When using more than one intrinsically safe circuit, the rules and regulations for interconnection shall duly be observed.

Sheet 1/2

The composition of the protection symbol will be based on the types of protection of components actually used.

Plug connector


The plug-and-socket device of type GHG 512.... R... is supplemented by plug connector GHG 532 .7.. V.... (old design) of plug-and-socket device GHG 532 V.... (former certificate of conformity PTB No. Ex-85.B.1066). Respecting its explosion-protection characteristics, the plug connector is identical in design.

Test report: PTB Ex 02-12242

Zertifizierungsstelle Explosionsschutz

Braunschweig, July 30, 2002

By order:

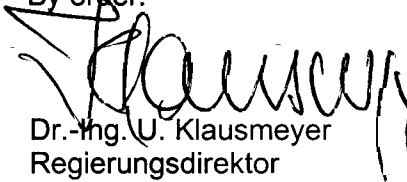
Dr.-Ing. U. Klausmeyer
Regierungsdirektor



2nd SUPPLEMENT

according to Directive 94/9/EC Annex III.6

to EC-TYPE-EXAMINATION CERTIFICATE PTB 99 ATEX 1041

(Translation)

Equipment: Plug-and-socket device, type GHG 512 R....

Marking:  II 2 G EEx de [ia] IIC T6 or T5 IP 66 T 60 °C

Manufacturer: Cooper Crouse-Hinds GmbH previously CEAG Sicherheitstechnik GmbH

Address: Neuer Weg Nord 49
69412 Eberbach, Germany

Description of supplements and modifications

The plug-and-socket device, type GHG 512R.... , may also be manufactured with the following modifications:

- For special voltage ratings, the mechanical characterization 1h, 8h and 12h will be used.
4-pole < 690 V
5-pole < 500 V
3-pole < 400 V
- The plug-and-socket device may also be used in the hazardous area "dust". In that case, the marking is as follows:

 II 2 G/D EEx ed [ia] IIC T6 or T5 IP 66 T 60 °C

The composition of the protection symbol will be based on the types of protection of the components actually used.

Test report: PTB Ex 04-13046

Zertifizierungsstelle Explosionsschutz

By order:


Dipl.-Phys. U. Volkel



Braunschweig, April 01, 2004

Sheet 1/1

EC-type-examination Certificates without signature and official stamp shall not be valid. The certificates may be circulated only without alteration. Extracts or alterations are subject to approval by the Physikalisch-Technische Bundesanstalt. In case of dispute, the German text shall prevail.