

MAGNETVENTILER


Zoner:

0	1	2	20	21	22
---	---	---	----	----	----



Spole

Ex II 2 G Ex II 2 D Ex dm IIC T4 130°C, IP65 -40°C...+65°C				LCIE 03 ATEX 6451 X					
Art. nr	Typ	Isolationsklass	Elektrisk anslutning	Effekt DC		Effekt AC		Nominell spänning	Material
				Pn (varm)	Pn (kall) 20°	Pn (hållning)	Dragning, kall		
125340	495905	H (180°)	På plint i kopplingsbox M20x1,5. (7-11 mm) max ledararea 2,5mm²	8W	9W	8W	9W	230V AC	Plast
125341								24V DC	

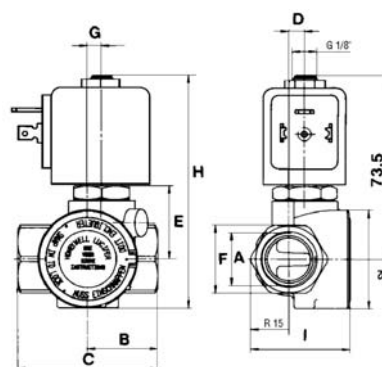

Ventiltyp	A	B	C	Ø	D	E	F	G	H	I
321 K 31/3106	1/4	25,0	50	40	6,2	26	27	5,5	81,0	39
321 K 33/3306	3/8	25,0	50	40	6,2	26	27	5,5	81,0	39
321 K 35/3506	1/2	27,5	55	40	6,2	26	27	5,5	81,0	39
321 K 36/3606	3/4	40,0	80	56	9,0	33,5	32	8,0	96,5	46
321 K 37/3706	1	42,5	85	56	14,2	33,5	41	8,0	96,5	56

Ventil strömlöst öppen

Art. nr	Typ	Anslutning G	Genomlopp mm	Kapacitet l/min		Tätning	Effekt W		Tryckfall Δp (bar)		Max media temperatur °C			Material
				Gas Qn	Vätska Kv		DC	AC	Min	Max DC AC	Gas	Vätska	Hydraul-/eldningsolja	
125335	322 K 4106	1/4	12	2150	30	VITON	9	8	0,3	12 12	100	100	100	Mässing
125336	322 K 4306	3/8	12	3050	45									
125337	322 K 4506	1/2	12	3400	50									
125338	322 K 4606	3/4	18	9400	100									
125339	322 K 4706	1	18	10150	110									

Ventil strömlöst stängd

Art. nr	Typ	Anslutning G	Genomlopp mm	Kapacitet l/min		Tätning	Effekt W		Tryckfall Δp (bar)		Max media temperatur °C			Material
				Gas Qn	Vätska Kv		DC	AC	Min	Max DC AC	Gas	Vätska	Hydraul-/eldningsolja	
125330	321 K 4106	1/4	12	2150	30	VITON	9	8	0,3	12 12	100	100	100	Mässing
125331	321 K 4306	3/8	12	3050	45									
125332	321 K 4506	1/2	12	3400	50									
125333	321 K 4606	3/4	18	9400	100									
125334	321 K 4706	1	18	10150	110									