


USB PCB

USB component
for HID devices

Article-No.:
6089-057-001-00

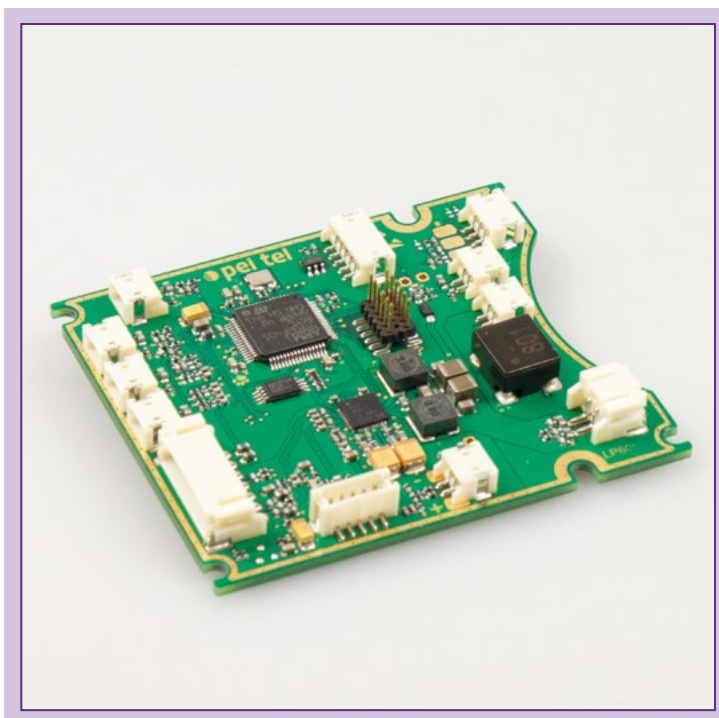

Product:

Characteristics

- 5 inputs for buttons
- 2 microphone inputs (separately selectable)
- 3 LEDs (freely selectable colour)
- 1 loudspeaker output
- 1 headset connection
- Power supply via USB
- For electret or dynamic microphones
- HID compatible

Application Range

- Desktop microphones
- Customer specific application

Accessories

- Gooseneck microphones

Scope of Delivery

- USB PCB
- USB Typ A connection cable 2 m

Technical Data:

General

Operating voltage:	5 V
Consumption:	max. 200 mA
Dimensions:	Length: 65 mm, Width: 55,5 mm, Height: 12,5 mm
Weight:	22 g
Storage temperature:	-40 °C to +70 °C
Operating temperature:	-30 °C to +60 °C

Microphone amplifier

Frequency range:	33 Hz to 4,7 kHz at -10 dB
Input voltage:	1 - 10 mV
Gain:	Adjustable
Connection:	2 pole JST
Type:	Dynamic or electret

Loudspeaker amplifier

Frequency range:	30 Hz to 20 kHz at -10 dB
Input voltage:	USB
Maximum output:	max. 1 W / 8 Ω
Connection:	2 pole JST