

LED floodlight

FOCO L

7700 6403

[Item no. : 77000 0008]



General product description



LED floodlight FOCO L, consisting of powder-coated die-cast aluminium housing, two-part. Upper part with LED modules, lower part with ECG, tempered safety glass pane, cable entry and strain relief, hinged. Zhaga LED modules, direct beam, Multi-Layer Technology. ECG with high surge protection, overload and short circuit protection. Mounting bracket with swivel range of 180°.

General product benefits

- perfect thermal management due to direct connection of the LED modules to the housing, large cooling surface, excellent thermal conductivity
- homogenous illumination due to Multi-Layer Technology, i.e. every individual LED illuminates the whole surface, the light distribution curves of the LED are overlapping
- comfortable maintenance due to hinged and removable lower part of the housing, large opening allows easy access to the terminal box and the electrical components, ECG replaceable on-site
- future proof by using standardised Zhaga LED modules

Applications

Industrial and storage areas, terminals, construction sites, facade illumination etc.

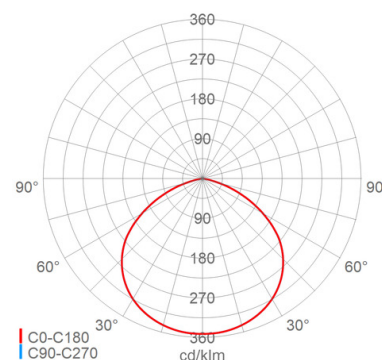

LED floodlight

FOCO L**7700 6403****[Item no. : 77000 0008]****Technical data****Key technical data**

Lamp type:	LED
LED module standard:	Zhaga
Connected load:	140 W
Luminaire luminous flux:	19400 lm
Luminous efficacy:	139 lm/W
Colour temperature:	4000 K
Colour rendering (CRI):	≥ 70
Light colour:	740
Admissible ambient temperature t _a :	-40 °C to +40 °C
Control gear:	1 x ECG, Overload protection , Short circuit protection
Overvoltage protection:	10 kV

Features/Certificates

Approval marks:	CE
Energy efficiency class:	A++

Dimension/Weight

Length:	573 mm
Width/Diameter:	360 mm
Height:	100 mm
Net weight:	9.70 kg
EAN/GTIN:	4041254283487

Lighting technology

Light distribution:	wide beam
Beam angle:	115 °
Photobiological safety:	RG2

Service life

Service life LED:	L90>100000 h (@ t _a max)
-------------------	-------------------------------------

Electrical connection

Rated voltage:	220-240 V, 50/60 Hz
Terminal clamp:	Screw terminal, 3-polig, 0.75 - 2.5 mm ²
Max. no. (with CB B16):	7
CB B10/B13/B20/B25:	4/5/8/10
CB C10/C13/C16/C20/C25:	7/9/11/14/18
Cable entries:	M20 (2x), screw plug (1x), cable gland (1x), Plastic, 6 - 13 mm

Housing

Housing material:	Die-cast aluminium
Varnished:	Yes
Colour:	grey, DB702N

Cover

Cover type/material:	Pane (Safety glass)
Cover characteristic:	clear
Closure:	screwed

Mounting

Mounting method (accessories possibly needed):	Ceiling with bracket, Wall with bracket
Operating position:	downwards radiation
Mounting:	2-point
Swivel range:	0 - 180 °
Wind-exposed surface:	0.15 m ²

Features/Certificates

Protection class:	I
IP rating:	IP66
IK rating:	IK10

LED floodlight

FOCO L**7700 6403**

[Item no. : 77000 0008]

Optional accessories/spare parts

Item no.	Item name	Item description
78001 9002	7700/010	spare safety glass
75739 9010	7700/7800/1 M	pole-top bracket for single-mounting
75739 9011	7700/7800/2 M	pole-top bracket for double-mounting
90120 9011	2530	plastic cable gland M20x1.5, black
90121 9008	2600	plastic screw plug M20x1.5, black
90270 0005	ROB 60/76	pipe clamp for pole ø 60-76mm
75350 0034	SD 7700 ST	Vibration-absorbing mounting, galvanised steel