

**SALUKA-N-LED-OP-10000-236-G2-4K, IP66**


Product type: 080005

Item number: 42091

IP66

 2/22


Linear luminaire designed for explosion hazardous areas for ATEX zone 2/22. Body made of painted steel sheet (RAL 9016) with EPDM gasket – alternatively stainless steel AISI304 or AISI316. Cover made of opal tempered safety glass. Fitted with high quality electronic components with high LED lifetime up to 100 000 h and an efficiency of 154 lm/W. Characterized by high splash and dust resistance IP66. Suitable for ambient temperatures from -20 °C to +60 °C (depending on luminaire variant). Silicone-free design. Designed to be mounted or suspended.

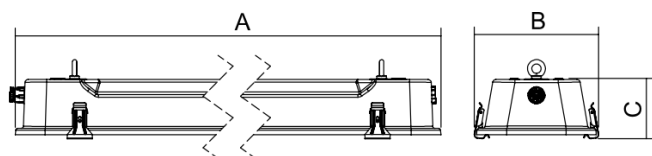
**Dimensions**

<b>A x B x C</b>	1305 mm x 192 mm x 90 mm
------------------	--------------------------

<b>Net weight</b>	6,05 kg
-------------------	---------

## Specifications

### Light technical data

<b>Lighting fixture luminous flux</b>	8819 lm +/-10%	<b>Luminaire efficiency</b>	152 lm/W
<b>CRI</b>	≥80	<b>MacAdam</b>	3
<b>Beam angle</b>	Very wide beam >80°	<b>Colour temperature</b>	4000 K

### Electrical data

<b>Power input</b>	58 W	<b>Rated voltage AC</b>	220-240 V
<b>Frequency</b>	50/60 Hz	<b>Rated voltage DC</b>	220-240 V
<b>Control method</b>	ON/OFF luminaire	<b>Insulation class</b>	I
<b>Number of luminaires per circuit breaker B10A</b>	6	<b>Number of luminaires per circuit breaker B16A</b>	10
<b>Number of luminaires per circuit breaker C10A</b>	10	<b>Number of luminaires per circuit breaker C16A</b>	16
<b>Momentum current</b>	58 A		

### Mechanical data

<b>IP classification</b>	IP66	<b>IK classification</b>	IK07
<b>Warranty</b>	5 years	<b>Operating temperature</b>	-20°C ≤ t ≤ 50°C

### Certification

<b>ATEX</b>	FTZÚ 17 ATEX 0027X	<b>EAC</b>	EAES N RU E-CZ.PA01.B.01682/21
-------------	--------------------	------------	--------------------------------

### Explosion protection ATEX

<b>Ex ZONE</b>	2/22	<b>ATEX zone – gas</b>	Ex II 3G Ex nR IIC T6 Gc
<b>ATEX zone – dust</b>	Ex II 3D Ex tc IIIC T80°C Dc		

### Materials

<b>Material of the body</b>	painting steel sheet	<b>Body colour</b>	white RAL 9016
<b>Cover material</b>	OPG – frosted tempered safety glass		

**Packaging****Barcode (EAN)**

8592040292818

**Number of pieces per pallet**

27 pcs

**Gross weight**

6,95 kg

**Accessories to order****EXTEND/SALUKA ceiling fixings set (2 pcs)**

Item number: **3583**  
Product type: **051139**

**SALUKA flange Ø 50 mm (1 1/2"), AISI304**

Item number: **3589**  
Product type: **051145**

**Stainless steel wall arm SALUKA AISI304 – 60 °C (1 pc)**

Item number: **3591**  
Product type: **051147**


**Set of adjustable holders SALUKA (2 pcs)**

Item number: **28788**  
Product type: **063754**

**SALUKA flange Ø 40 mm, AISI304**

Item number: **30316**  
Product type: **064018**

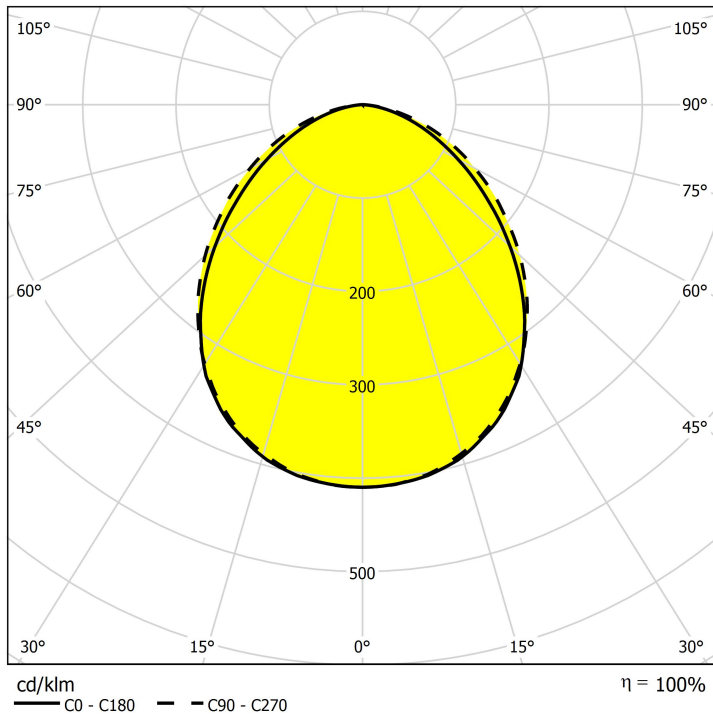

**Polar diagram**

© 2026 All rights reserved. VYRTYCH a.s. does not warrant the accuracy or completeness of the information provided herein and is not responsible for any events that may occur as a result of unqualified reliance on this information. The information contained herein does not constitute a commercial offer and does not form part of a quotation or contract, unless confirmed by VYRTYCH a.s..