


SALUKA-N-LED-OP-16700-258-G2-4K, IP66

Product type: 080009

Item number: 42103

IP66
 **2/22**


Linear luminaire designed for explosion hazardous areas for ATEX zone 2/22. Body made of painted steel sheet (RAL 9016) with EPDM gasket – alternatively stainless steel AISI304 or AISI316. Cover made of opal tempered safety glass. Fitted with high quality electronic components with high LED lifetime up to 100 000 h and an efficiency of 154 lm/W. Characterized by high splash and dust resistance IP66. Suitable for ambient temperatures from -20 °C to +60 °C (depending on luminaire variant). Silicone-free design. Designed to be mounted or suspended.

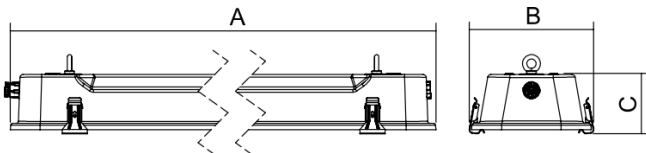
Dimensions

A x B x C	1605 mm x 192 mm x 90 mm
------------------	--------------------------

Net weight	8,22 kg
-------------------	---------

Specifications

Light technical data

Lighting fixture luminous flux	14175 lm +/-10%	Luminaire efficiency	149 lm/W
CRI	≥80	MacAdam	3
Beam angle	Very wide beam >80°	Colour temperature	4000 K

Electrical data

Power input	95 W	Rated voltage AC	220-240 V
Frequency	50/60 Hz	Rated voltage DC	220-240 V
Control method	ON/OFF luminaire	Insulation class	I
Number of luminaires per circuit breaker B10A	9	Number of luminaires per circuit breaker B16A	15
Number of luminaires per circuit breaker C10A	15	Number of luminaires per circuit breaker C16A	25
Momentum current	22 A		

Mechanical data

IP classification	IP66	IK classification	IK07
Warranty	5 years	Operating temperature	-20°C ≤ t ≤ 50°C

Certification

ATEX	FTZÚ 17 ATEX 0027X	EAC	EAES N RU E-CZ.PA01.B.01682/21
-------------	--------------------	------------	--------------------------------

Explosion protection ATEX

Ex ZONE	2/22	ATEX zone – gas	Ex II 3G Ex nR IIC T6 Gc
ATEX zone – dust	Ex II 3D Ex tc IIIC T80°C Dc		

Materials

Material of the body	painting steel sheet	Body colour	white RAL 9016
Cover material	OPG – frosted tempered safety glass		

Packaging**Barcode (EAN)**

8592040292276

Number of pieces per pallet

24 ks

Gross weight

9,16 kg

Accessories to order**EXTEND/SALUKA ceiling fixings set (2 pcs)**

Item number: **3583**
Product type: **051139**

**SALUKA flange Ø 50 mm (1 1/2"), AISI304**

Item number: **3589**
Product type: **051145**

**Stainless steel wall arm SALUKA AISI304 – 60 °C (1 pc)**

Item number: **3591**
Product type: **051147**

**Set of adjustable holders SALUKA (2 pcs)**


Item number: **28788**
Product type: **063754**

**SALUKA flange Ø 40 mm, AISI304**

Item number: **30316**
Product type: **064018**



Polar diagram

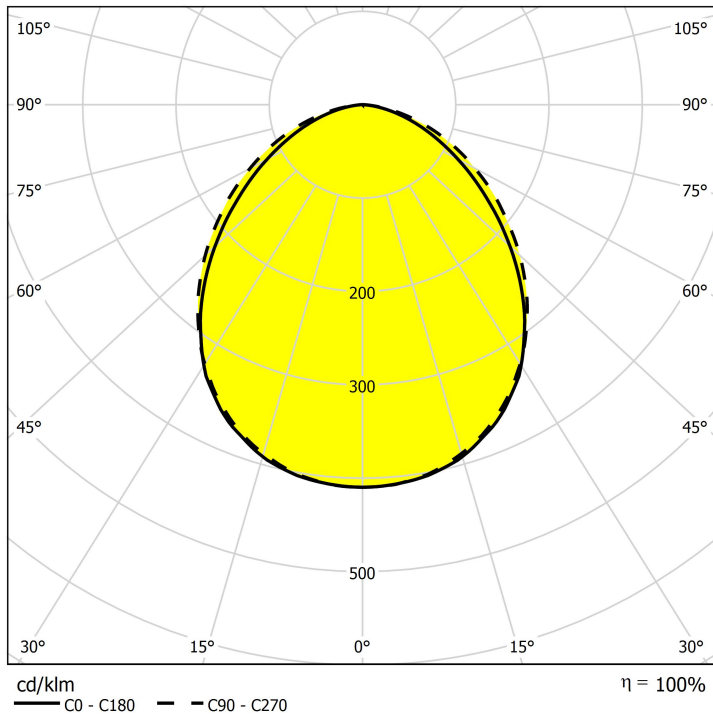

© 2026 All rights reserved. VYRTYCH a.s. does not warrant the accuracy or completeness of the information provided herein and is not responsible for any events that may occur as a result of unqualified reliance on this information. The information contained herein does not constitute a commercial offer and does not form part of a quotation or contract, unless confirmed by VYRTYCH a.s..