


AQUA-70-Ex-LED

IP 66 / IP 68 /  zone 1, 21



FTZÚ 17 ATEX 0052X

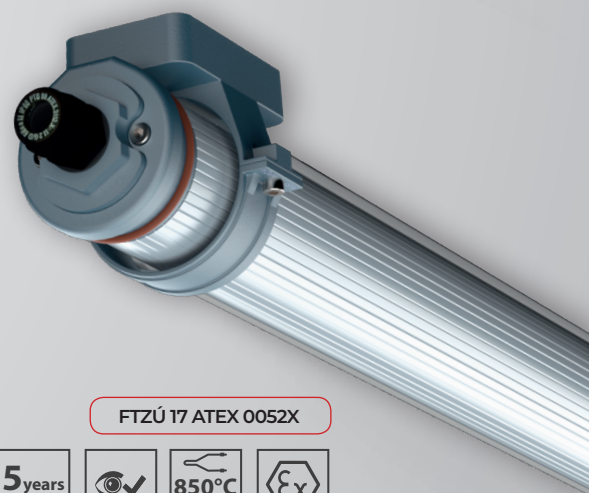

Application: Dustproof and water-tight lighting fixture AQUA-70-Ex-LED is designed for lighting of areas with danger of explosion. The lighting fixture is certified by FTZU Ostrava-Radvanice (certificate type FTZU 17 ATEX 0052X).

Ballast: EP – electronic 110-254 V, 50-60 Hz AC, 220-250 V, 0 Hz DC

Light source: LED, 4000K, CRI +80

Housing: Tube with outer diameter of 70 mm and wall thickness of 4 mm made from clear PC - IK10 (polycarbonate)

Fastening: Surface wall or ceiling mounting by means of plastic or stainless steel mounting brackets (not standard equipment) or suspension by means of cable suspenders

Standard equipment: 1pc EX plastic cable gland M20x1,5 for diameter of cable 7-13mm, 1pc EX plastic sealing plug

Calculated lifetime – LED modules:

L80B50 ta50 – 45 000h

AQUA-70-Ex-LED-D


⊕ II 2G Ex db eb mb op is IIC T4 Gb

⊕ II 2D Ex tb op is IIIC T62°C Db

AQUA-70-Ex-LED-WOD

⊕ II 2G Ex eb mb op is IIC T4 Gb

⊕ II 2D Ex tb op is IIIC T62°C Db

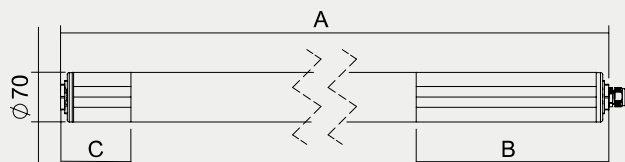


Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output	Ta max (°C)	Equivalent*	Dimensions of lighting fixture A x B x C (mm)	Weight (kg)
084240	AQUA-70-Ex-LED-D-2750-118-4K	2107	16	132	50	X	1149x425x65	2,9
084200	AQUA-70-Ex-LED-D-4000-118-4K	3061	28	109	50	1x36W	1149x425x65	2,9
084241	AQUA-70-Ex-LED-D-5500-136-4K	4175	30	139	50	1x58W	1709x425x65	4,7
084201	AQUA-70-Ex-LED-D-8000-136-4K	5985	51	117	50	X	1709x425x65	4,7
084242	AQUA-70-Ex-LED-WOD-2750-118-4K	2107	16	132	50	X	1149x425x65	2,9
084202	AQUA-70-Ex-LED-WOD-4000-118-4K	3061	28	109	50	1x36W	1149x425x65	2,9
084243	AQUA-70-Ex-LED-WOD-5500-136-4K	4175	30	139	50	1x58W	1709x425x65	4,7
084203	AQUA-70-Ex-LED-WOD-8000-136-4K	5985	51	117	50	X	1709x425x65	4,7

Tolerance of luminous flux and power input of the lighting fixture +/- 10%


* Luminaires are not a direct replacement. They may vary in length. The required lighting of the room must be verified by calculation.

AQUA-70-Ex-LED




— C0-C180 - - - - C90-C270

Accessories on request

	<table><tr><td>008096</td><td>Plastic cable gland Ex M20x1.5</td></tr><tr><td>008097</td><td>Plastic nut WISKA EMUG 20 M20x1.5</td></tr><tr><td>008090</td><td>Sealing plug Ex M20x1.5</td></tr><tr><td>007047N</td><td>Flat sealing ring EPDM 26x20x1.5 mm</td></tr></table>	008096	Plastic cable gland Ex M20x1.5	008097	Plastic nut WISKA EMUG 20 M20x1.5	008090	Sealing plug Ex M20x1.5	007047N	Flat sealing ring EPDM 26x20x1.5 mm		<table><tr><td colspan="2">Direct mounting</td></tr><tr><td>064898</td><td>Stainless steel mounting bracket AQUA-70 (1 pc) for direct surface mounting</td></tr></table>	Direct mounting		064898	Stainless steel mounting bracket AQUA-70 (1 pc) for direct surface mounting								
008096	Plastic cable gland Ex M20x1.5																						
008097	Plastic nut WISKA EMUG 20 M20x1.5																						
008090	Sealing plug Ex M20x1.5																						
007047N	Flat sealing ring EPDM 26x20x1.5 mm																						
Direct mounting																							
064898	Stainless steel mounting bracket AQUA-70 (1 pc) for direct surface mounting																						
	<table><tr><td colspan="2">Direct mounting</td></tr><tr><td>053627</td><td>Stainless steel mounting bracket AQUA-70 (1 pc)</td></tr></table>	Direct mounting		053627	Stainless steel mounting bracket AQUA-70 (1 pc)		<table><tr><td colspan="2">Direct mounting</td></tr><tr><td>053629</td><td>Mounting PC bracket AQUA-70, dark grey (1pc)</td></tr><tr><td colspan="2">Suspended mounting</td></tr><tr><td>051127</td><td>Cable suspension AQUA-70 (2 pcs)</td></tr><tr><td>053629</td><td>Mounting PC bracket AQUA-70, dark grey (1pc)</td></tr></table>	Direct mounting		053629	Mounting PC bracket AQUA-70, dark grey (1pc)	Suspended mounting		051127	Cable suspension AQUA-70 (2 pcs)	053629	Mounting PC bracket AQUA-70, dark grey (1pc)						
Direct mounting																							
053627	Stainless steel mounting bracket AQUA-70 (1 pc)																						
Direct mounting																							
053629	Mounting PC bracket AQUA-70, dark grey (1pc)																						
Suspended mounting																							
051127	Cable suspension AQUA-70 (2 pcs)																						
053629	Mounting PC bracket AQUA-70, dark grey (1pc)																						
	<table><tr><td colspan="2">Direct mounting</td></tr><tr><td>053628</td><td>Stainless steel mounting bracket AQUA-70 (1 pc)</td></tr><tr><td colspan="2">Suspended mounting</td></tr><tr><td>051134</td><td>Cable suspension AQUA-70 (2 pcs) stainless steel</td></tr><tr><td>053628</td><td>Stainless steel mounting bracket AQUA-70 (1 pc)</td></tr></table>	Direct mounting		053628	Stainless steel mounting bracket AQUA-70 (1 pc)	Suspended mounting		051134	Cable suspension AQUA-70 (2 pcs) stainless steel	053628	Stainless steel mounting bracket AQUA-70 (1 pc)		<table><tr><td colspan="2">Direct mounting</td></tr><tr><td>053630</td><td>Mounting PC bracket AQUA-70, bright grey (1pc)</td></tr><tr><td colspan="2">Suspended mounting</td></tr><tr><td>051127</td><td>Cable suspension AQUA-70 (2 pcs)</td></tr><tr><td>053630</td><td>Mounting PC bracket AQUA-70, bright grey (1pc)</td></tr></table>	Direct mounting		053630	Mounting PC bracket AQUA-70, bright grey (1pc)	Suspended mounting		051127	Cable suspension AQUA-70 (2 pcs)	053630	Mounting PC bracket AQUA-70, bright grey (1pc)
Direct mounting																							
053628	Stainless steel mounting bracket AQUA-70 (1 pc)																						
Suspended mounting																							
051134	Cable suspension AQUA-70 (2 pcs) stainless steel																						
053628	Stainless steel mounting bracket AQUA-70 (1 pc)																						
Direct mounting																							
053630	Mounting PC bracket AQUA-70, bright grey (1pc)																						
Suspended mounting																							
051127	Cable suspension AQUA-70 (2 pcs)																						
053630	Mounting PC bracket AQUA-70, bright grey (1pc)																						

Lighting fixture detail

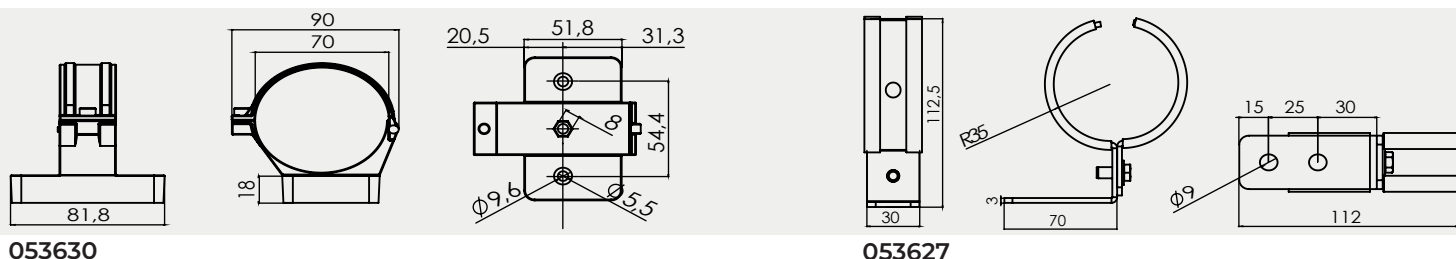

Marking system and overview of approved variants of lighting fixtures

AQUA-70-Ex-LED-D-XXXX-YYY	lighting fixture type for standard operation with disconnecter
AQUA-70-Ex-LED-WOD-XXXX-YYY	lighting fixture type for standard operation without disconnecter
XXXX*	indicates value of luminous flux (lumen) 4000/8000
YYY*	indicates type of lighting fixture housing 118/136

On request

3000/4000/6000K- colour temperature

1/3 F - single-phase or three phase through wiring connection, max. diameter of wires 4 mm²

Stadard order number	EM-1H	EM-3H	MULTI-1H	MULTI-3H	DALI	1F	3F
084200	X	X	X	X	X	084200 1F	X
084201	X	X	X	X	X	084201 1F	X
084202	X	X	X	X	X	084202 1F	X
084203	X	X	X	X	X	084203 1F	X

Use of lighting fixtures in areas with danger of explosion

Danger of explosion of flammable dust
Danger of explosion of flammable gases and vapours

Marking of external influences

BE3N1
BE3N2

Marking
ZONE 21.22
ZONE 1.2

Area classification

Directive
ČSN EN 60079-14, ČSN EN 60079-10-2
ČSN EN 60079-14, ČSN EN 60079-10-1