

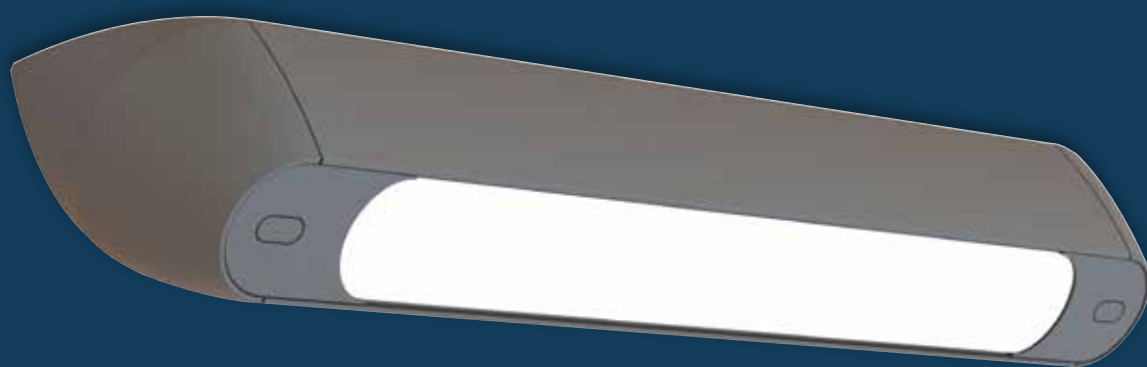


SYSTEMO A45



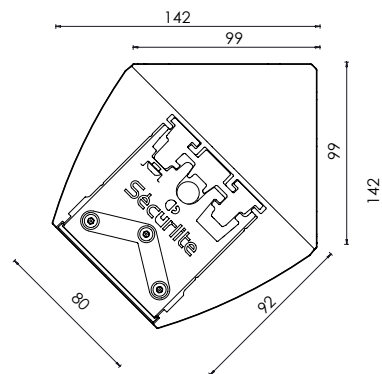

CHARACTERISTICS

- IP65 rated waterproof luminaire with high impact resistance IK11*/80 J rated curved aluminium profile.
- Opalescent or clear diffuser with optics
- For mounting at an angle with a pull-resistant mount
- Not apparent quick power connection
- Fine texture RAL 7016 anthracite grey ● finish


OPTIONS AVAILABLE ON REQUEST

- Motion detector adjustable via radio-control or smartphone
- Pack emergency version available
- High UV resistance or anti-graffiti coating
- Through wiring
- Concealment panels for surface mounting
- Side cable entry

Concealment panels for surface mounting available to order separately:

- L(mm) 1066: code 9855 1002

- L(mm) 1346: code 9855 1003

 Vandal-proof tool available to order separately.
Code M4: 9800 0036
+

Code M5: 9800 0012



Radio-control for wireless control available to order separately.
Code: 9800 0010

SYSTE0 A45 – Opalescent

220-240 V AC / 50/60 Hz



 direct 778

Length L (mm)	Power rating (W)	Luminaire light output (lm) 4000 K	Luminaire efficacy (lm/W)	Opalescent surface mounted
1066	9	850	97	5508 14--
1066	14	1400	100	5502 14--
1066	26	2700	104	5503 14--
1346	19	1950	103	5504 14--
1346	37	3800	103	5505 14--

Durability: L80B10 / over 72 000 hours
L90B50 / 50 000 hours

Codification for 3000 K

colour temperature:
replace the figure 4 by a 3.

Codification: replace the two dashes (--)
by the appropriate figures:
for instance 5502 14--

for instance 4000K: 5502 14--
3000K: 5502 13--

- 00 NO DETECTION
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 21 DALI DIMMABLE + SWITCH DIMMING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING