



TALK

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 2
- IP: 67
- IK: 10 / 20 joules
- Incandescent wire test 850° / 30 s
- Rated ambient operating temperature: 25 °C to NF EN 60598-1 standard
- IRC 80
- VK20
- SDCM (Standard Deviation Colour Matching): 5
- LED module life > 50,000 hr (L70B50)
- Photobiological hazard: RG0

Applications

- Flush-mounting luminaire for outdoor environment subject to moderate vandalism
- Installation positions: refer to installation instructions

Materials

- Fascia: 316L stainless, 3 mm
- Polycarbonate diffuser, 4 mm
- Metal back box
- RoHS: the products contain no prohibited substances as defined in the European Directive 2002/95/UE and amendments

Colours / Finish

- Brushed 316L stainless

Wiring

- Unwired male / female IP67 plug provided for customer connection

Approvals


Certificates available:

- CE certificate (as per EN60598-1 / 2-1 / 2-2)
- Incandescent Wire Test certificate (depending on product)

Technical data sheet

TALK - FT0219-A4-A

Dimensions

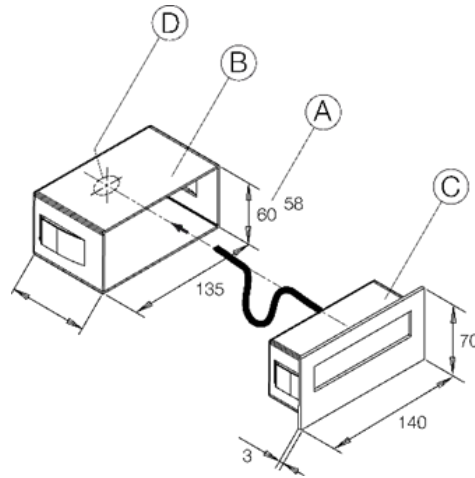

A, B, C and D : refer to installation instructions

| TALK | | | | | | |
|-------------|---------|-----------|-----------------------|---------------------------|-------------|-----------|
| Designation | CCT (K) | Power (W) | Luminaire Output (lm) | Luminaire efficacy (lm/W) | Height (mm) | Code |
| Talk | 4000 | 2,5 | 97 | 48,5 | 140 | 8600 8400 |

Standard anchoring: code: **9885 0003**

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.