




LED built-in and surface mounted lamp with up to 30 POWER LED. Due to the modular construction available in different length.

- Illuminant: 6/12/18/24 or 30 POWER LED / 6500K
- Protection tube: polycarbonate, shock-resistant, 40mm Ø
- Optional available with diffuser foil (model 4006 - 4018)
- End cap: aluminium, black anodized
- Fixation: incl. 2 fixing clamps made of plastic
- Protection category: IP65
- Protection class: II
- Cable: 5m H05RN-F 2x1,00mm²
- Voltage: 230V (110V - on request)
- Longer cable, cable type, plug etc. on request.

Technische Details | Technical details

Type	Number LED	Volt	Ampere	Lumen	Protection Class	Protective Tube	IP	Cable	Plug	Weight	Art.-No.
KE-LED-EA 4006-P/230	6	230V AC	0,060	600	II	Polycarbonat	IP65	5m H05RN-F	ohne w/o	0,650 kg	131654
KE-LED-EA 4012-P/230	12	230V AC	0,075	1200	II	Polycarbonat	IP65	5m H05RN-F	ohne w/o	0,750 kg	131655
KE-LED-EA 4018-P/230	18	230V AC	0,100	1800	II	Polycarbonat	IP65	5m H05RN-F	ohne w/o	0,850 kg	131656
KE-LED-EA 4024-P/230	24	230V AC	0,110	2400	II	Polycarbonat	IP65	5m H05RN-F	ohne w/o	0,950 kg	131657
KE-LED-EA 4030-P/230	30	230V AC	0,130	3000	II	Polycarbonat	IP65	5m H05RN-F	ohne w/o	1,050 kg	131658

Abmessungen | Dimensions

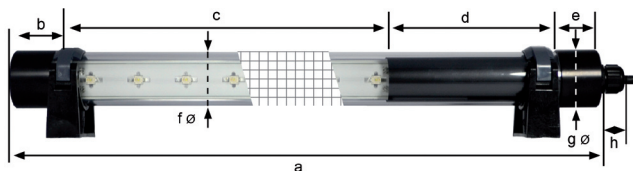

Abmessungen in mm | Dimensions in mm

	a	b	c	d	e	f	g	h
KE-LED-EA 4006/230	410	30	230	120	30	40	43	20
KE-LED-EA 4012/230	620	30	440	120	30	40	43	20
KE-LED-EA 4018/230	830	30	650	120	30	40	43	20
KE-LED-EA 4024/230	1040	30	860	120	30	40	43	20
KE-LED-EA 4030/230	1250	30	1070	120	30	40	43	20