


I.OCDV1.12/16.02.2022

TM TECHNOLOGIE
emergency & evacuation lighting

IP 20 LED 3h 850 °C 210 ÷ 250 V AC
50 / 60 Hz 186 ÷ 254 V DC



TM.ONTEC C (D)

100-130 °C 151-180 °C 151-180 °C 0.7 m

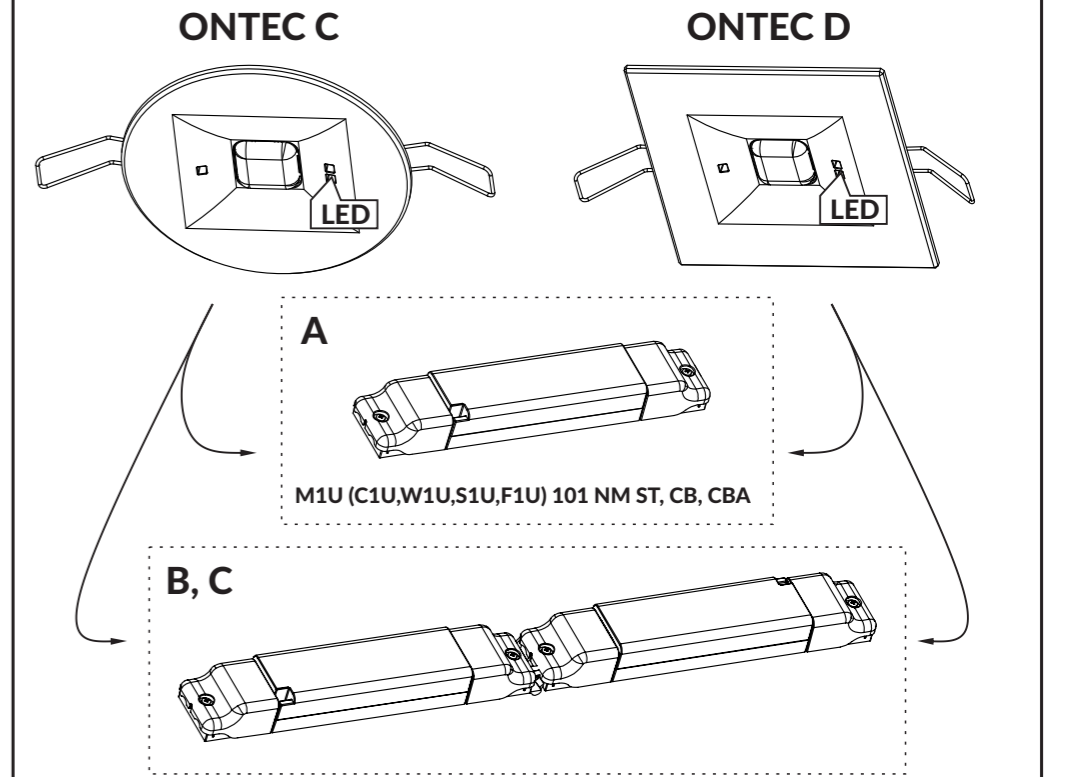

! ±1 [mm] ! **M2H (C1H, W1H, S1H, F1H)

CBA / D2 / D2R / DA

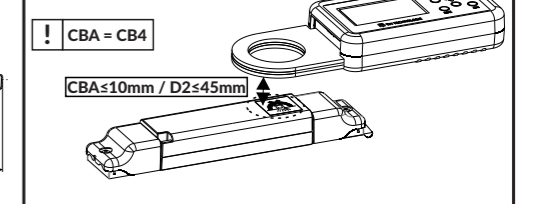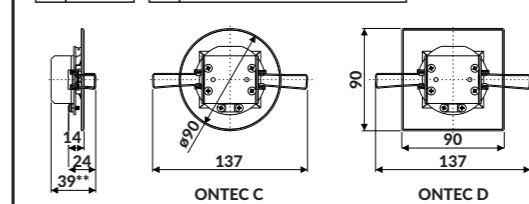

1 B, C

