

RONDO



BVCert. 6037554



Design: Xavier Houy

Rondo, the luminaire with a timeless look, that's designed to last.

Surface or flush mounted, the most powerful and robust of the architectural luminaires for communal areas in residential properties and outdoors.

**More powerful**

Up to 42 W fluorescent or LED 3000 lm.


**More efficient**

Thanks to its lighting management: DALI ballasts and LED and fluorescent dimming solutions.

**Greater savings**

With the new Sensor Pro detectors or twilight switches built in.

- 1** 3.5 mm polycarbonate diffuser (120 J)
- 2** Vandal resistant screws
- 3** Marine-grade aluminium rip-out-resistant skirt
- 4** Supplied c/w sealing washers
- 5** Knock-out cable entries (2 sides, 1 central)

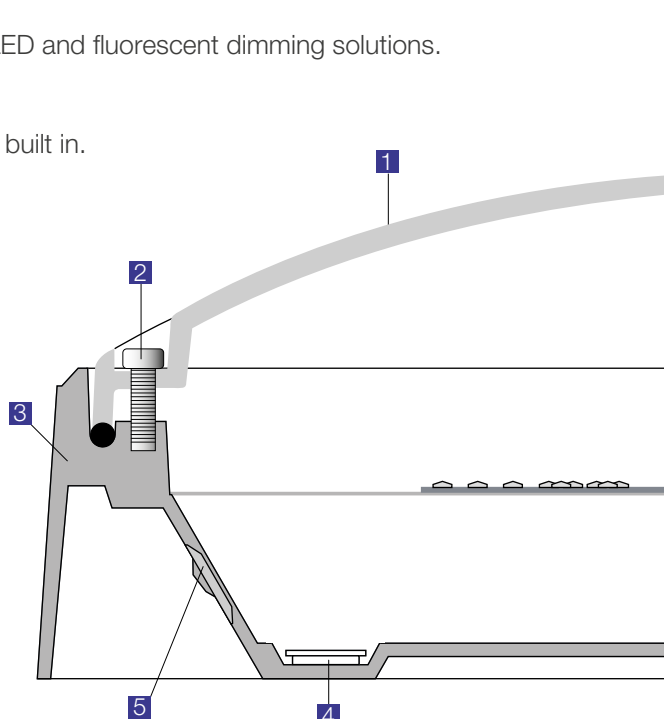

RONDO

IK10++ / 120 J




Surface or flush mounted,
the most powerful and robust
of the architectural luminaires.



Rondo

Rondino



Features:

- Architectural luminaire, 120-joules resistance
- Available in two sizes
- Die-cast marine-grade aluminium base
- Opal polycarbonate diffuser (except for Rondo fluo: clear frosted)
- CCT 4000 K, IRC min. 80
- Stainless steel vandal-resistant screws
- Plug-in gear tray


■ RAL9005 □ RAL9016 ■ RAL9006

Options available on request:


- 3000 K LEDs
- Version with emergency pack
- Standby LED
- Class 2
- Twilight photocell

— Vandal-resistant tool (bit) to be ordered separately
code: 9800 0003

☐ Radio remote control to be ordered separately
code: 9800 0010




ø 330 mm (Rondo)
ø 270 mm (Rondino)




114 mm (Rondo)
97 mm (Rondino)

Rondo - code: 2520 0400



Rondino - code: 2560 0400



LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
LED 1800	12	1550	129	2520 04 ..	2520 14 ..	2520 24 ..
LED 2400	17	2150	126	2523 04 ..	2523 14 ..	2523 24 ..
LED 3000	20	2550	128	2522 04 ..	2522 14 ..	2522 24 ..

Lifetime: L80B50 / 50,000 h

Coding:

replace the two dashes (--) by the corresponding figures: e.g. 2520 04 ..

- 00 no detection
- 20 DALI dimmable
- 12 with Pro detection
- 13 with Pro detection + extinction or standby warning
- 16 with Pro detection + radio-control
- 17 with Pro detection + extinction or standby warning + radio-control
- 03 slave version + extinction or standby warning
- 07 slave version + extinction or standby warning + radio-control

RONDO FLUO

Designation	Base	White	Grey	Black
2 x 18 W TC-DE	G24q-2	2500 04 ..	2500 14 ..	2500 24 ..
1 x 26 W TC-DE	GX24q-3	2501 04 ..	2501 14 ..	2501 24 ..
1 x 32 W TC-TE	GX24q-3	2502 04 ..	2502 14 ..	2502 24 ..
1 x 42 W TC-TE	GX24q-4	2503 04 ..	2503 14 ..	2503 24 ..

Supplied c/w lamps (4000 K)

* apart from exceptions

Coding:


replace the two dashes (--) by the corresponding figures: e.g. 2500 04 ..

- 00  no detection
- 21  DALI dimmable + switch dimming + standby warning
- 12  with Pro detection
- 14  with Pro detection + extinction warning
- 15  with Pro detection + standby warning
- 04  slave version + extinction warning
- 05  slave version + standby warning

Additional options Rondo

Coding:

add the corresponding suffix to the product code: e.g. 2520 0400 ----

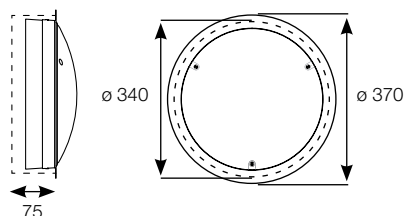

Flush-mounting dimensions:
Rondo: $\varnothing$ 340 mm x 75 mm

- 9406 opal PC diffuser (for fluorescent version)
- 9501 Class 1 (for fluorescent version)
- 9702 stainless steel crosspoint screws (VK54)
- 9802 flush-mounting version