

SENSPOT IP44 / IP65




Extra-compact LED downlight with detection

Design: agence PM design




New !
Vandal-resistant version
IK10+ 50J

Features:




- Impact-resistant flush-mounting spot
- Vandal-resistant version IK10+ 50 J: secure closure through Torx + pin screws
- White polyester lacquered zamak bezel RAL9016
- Clear polycarbonate diffuser
- White polycarbonate reflector
- CCT 4000 K, CRI min. 80
- Remote-control detector adjustment
- Separate power supply
- Suitable for outdoor environments (IP65)
- Connection type:
IP44 version: remote IP20 power supply
IP65 version: remote IP20 power supply in sealed box

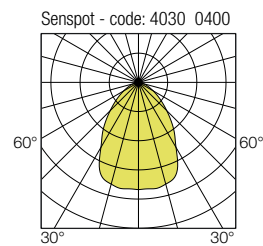


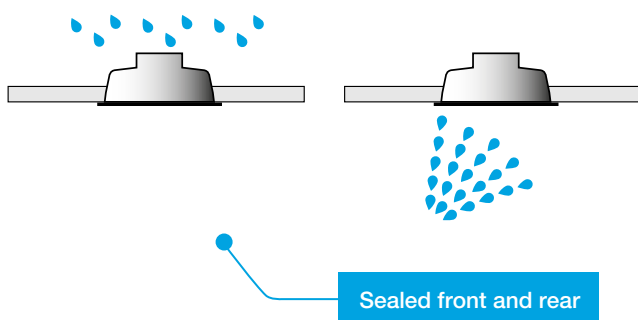
- RAL9016 (standard ring colour)
- RAL7035 (other ring colours on request)
- RAL9005 (other ring colours on request)

Options available on request:

- LED 3000 K
- Square adaptor kit for replacing old Sécurilite downlight with a Senspot: **code 98403003**
- Round adaptor kit for replacing old Sécurilite downlight with a Senspot: **code 98403004**
- Back box for use in concrete - Senspot IP44 : **code 98403002**
- Back box for use in concrete - Senspot IP65 : **code 98403001**

 Radio remote control to be ordered separately
code: 9800 0010

 Torx + pin bit for vandal-resistant Senspot to be ordered separately.
Code: 9800 0012



SENSPOT LED IP65

i direct 403

220/240 V AC / 50/60 Hz RoHS

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Standard code 20 J	Vandal-resistant code 50 J
LED 1700	12	1300	108	4030 04 ..	4040 04 ..
LED 2200	16	1630	102	4031 04 ..	4041 04 ..

Lifetime: L80B50 / 50,000 h

SENSPOT LED IP44

i direct 403

220/240 V AC / 50/60 Hz RoHS

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Standard code 20 J	Vandal-resistant code 50 J
LED 1700	12	1300	108	4035 04 ..	4045 04 ..
LED 2200	16	1630	102	4036 04 ..	4046 04 ..

Lifetime: L80B50 / 50,000 h

Coding:

replace the two dashes (--) by the corresponding figures: e.g. 4030 04 ..


- 00 no detection
- 03 slave version + extinction or standby warning
- 21 DALI dimmable + switch dimming + standby warning
- 43 with Pro detection + remote-adjustable extinction or standby warning

Standard version



Flush-mounting dimensions:
ø 160

IP44 A : 33 mm
IP65 A : 70 mm

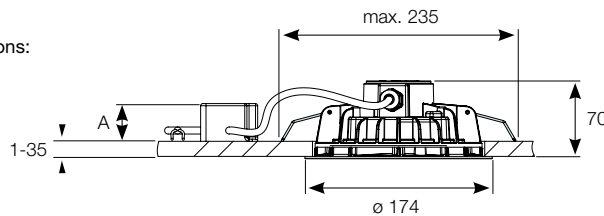


Vandal-resistant version



Flush-mounting dimensions: ø 160

IP44 A : 33 mm
IP65 A : 70 mm

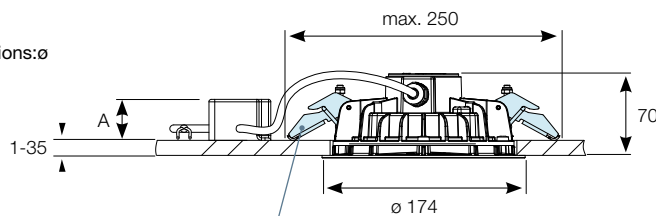

Rip-out resistant fastenings with vandal-resistant screws

