


TITAN



BVCert. 6037554

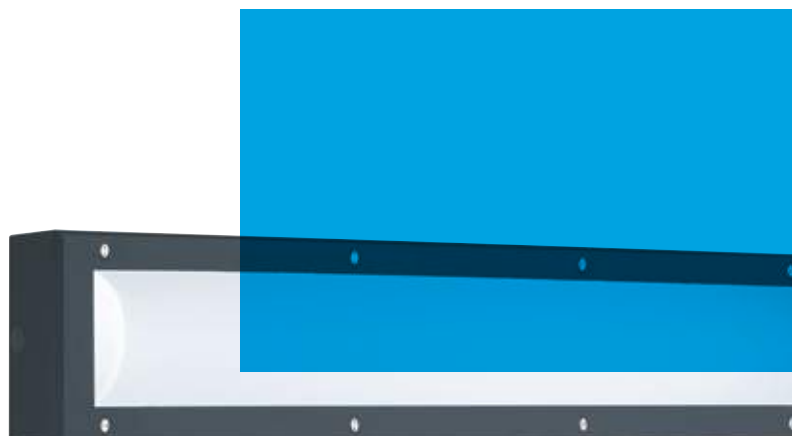

A range of elegant technical luminaires designed to withstand extreme vandalism in public spaces.

More light, less maintenance: the Titan is the long-life lighting solution that project owners and users of public spaces alike will find re-assuring!


Longer life

With LEDs and professional power supplies designed to last 50,000 hours.

Greater savings

Thanks to the LED fittings and lighting management systems: detection, dimming, etc.

- 1 Braced polycarbonate diffuser
- 2 Steel frame and base treated against corrosion, 2 mm thick
- 3 Seal compression chamber
- 4 Lip to prevent forced entry
- 5 Sliding, plug-in reflector gear tray
- 6 Anti-vibration pads
- 7 Supplied c/w sealing washers

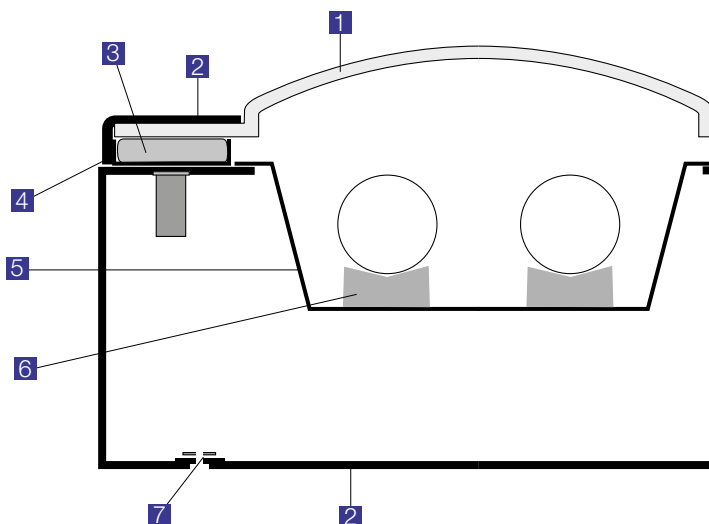


TITAN



A comprehensive range
of steel luminaires designed for
premises and pedestrian subways
subject to extreme vandalism.



Features:



- Luminaire withstands extreme vandalism
- Wall- (Titan C95) or 45° (Titan A45) or 30° (Titan A30) corner-mounted versions: body and frame in ZP steel
- Flush-mounting version (Titan E): body and frame in painted 304L stainless steel or all-stainless steel in brushed 316L stainless steel. Please enquire.
- CCT 4000 K, CRI min. 80
- Polyester powder-coated finish
- Braced clear pebble polycarbonate diffuser (for fluorescent version)
- Braced opal polycarbonate diffuser (for LED version)
- Stainless steel vandal-resistant screws
- Wall- and corner-mounting versions supplied c/w nickel-plated brass cable gland
- Flush-mounting version supplied c/w IP66 cable seal





■ RAL7016


Options available on request:

- 3000 K LEDs
- Colour white: RAL9003
- Quick connect version
- Version with emergency pack
- Standby LED
- Class 2
- Trunking (cover panel for linking between luminaires)

🔧 Vandal-resistant tool (bit) to be ordered separately
code: 9800 0004

📱 Radio remote control to be ordered separately
code: 9800 0010





TITAN A30 LED

i direct 617

220-240 V AC / 50/60 Hz RoHS

Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
720	21	2010	96	6171 14..
	43	4080	95	6173 14..
1330	43	4030	94	6175 14..
	70	6930	99	6177 14..

Lifetime: L90B50 / 50,000 h

Coding:

replace the two dashes (-) by the corresponding figures: e.g. **6171 14..**

- 00** no detection
- 21** DALI dimmable + switch dimming + standby warning
- 12** with Pro detection
- 14** with Pro detection + extinction warning
- 15** with Pro detection + standby warning
- 16** with Pro detection + radio-control
- 04** slave version + extinction warning
- 05** slave version + standby warning

TITAN A30 FLUO

i direct 610

220-240 V AC / 50/60 Hz RoHS

Length (mm)	Power	Base	Code
720	1 x 14 W T5	G5	6106 10..
	2 x 14 W T5	G5	6107 10..
	1 x 24 W T5	G5	6108 10..
	2 x 24 W T5	G5	6109 10..
1330	1 x 28 W T5	G5	6110 10..
	2 x 28 W T5	G5	6111 10..
	1 x 54 W T5	G5	6112 10..
	2 x 54 W T5	G5	6113 10..

Lamps not supplied. Other fluorescent versions : please contact us.

Coding:

replace the two dashes (-) by the corresponding figures: e.g. **6100 10..**


- 00** no detection
- 21** DALI dimmable + switch dimming + standby warning

Additional options for Titan A30

Coding:

add the corresponding suffix to the product code: e.g. **6171 1400..----**

- 9101** through wiring
- 9406** opal PC diffuser (for fluorescent version)
- 9413** flat Duroflam® diffuser
- 9415** flat opal PC diffuser
- 9416** flat clear pebble PC diffuser (for fluorescent version)
- 9601** anti-graffiti protection
- 9702** stainless steel crosspoint screws (VK54)



TITAN A45 LED

i direct 607

220-240 V AC / 50/60 Hz RoHS

Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
720	21	2010	96	6071 14 ..
	43	4080	95	6073 14 ..
1330	43	4030	94	6075 14 ..
	70	6930	99	6077 14 ..

Lifetime: L90B50 / 50,000 h

Coding:

replace the two dashes (--) by the corresponding figures: e.g. **6071 14 ..**

- 00** no detection
- 21** DALI dimmable + switch dimming + standby warning
- 12** with Pro detection
- 14** with Pro detection + extinction warning
- 15** with Pro detection + standby warning
- 16** with Pro detection + radio-control
- 04** slave version + extinction warning
- 05** slave version + standby warning

TITAN A45 FLUO

i direct 600

220-240 V AC / 50/60 Hz RoHS

Length (mm)	Power	Base	Code
720	1 x 14 W T5	G5	6006 10 ..
	2 x 14 W T5	G5	6007 10 ..
	1 x 24 W T5	G5	6008 10 ..
	2 x 24 W T5	G5	6009 10 ..
1330	1 x 28 W T5	G5	6010 10 ..
	2 x 28 W T5	G5	6011 10 ..
	1 x 54 W T5	G5	6012 10 ..
	2 x 54 W T5	G5	6013 10 ..

Lamps not supplied. Other fluorescent versions : please contact us.

Coding:

replace the two dashes (--) by the corresponding figures: e.g. **6000 10 ..**

- 00** no detection
- 21** DALI dimmable + switch dimming + standby warning

Additional options for Titan A45

Coding:

add the corresponding suffix to the product code: e.g. **6071 1400**

- 9101** through wiring
- 9406** opal PC diffuser (for fluorescent version)
- 9413** flat Duroflam® diffuser
- 9415** flat opal PC diffuser
- 9416** flat clear pebble PC diffuser (for fluorescent version)
- 9601** anti-graffiti protection
- 9702** stainless steel crosspoint screws (VK54)