

URBALINE



BVCert. 6037554


Vandal-resistant luminaire for public spaces, buildings, and transport.

URBALINE is a new LED luminaire vandal-resistant up to 150 joules (IK10⁺⁺) and marine corrosion resistant thanks to its treatment approved to the Qualanod quality mark, Class 20.

Particularly suitable for public transport infrastructures (stations, pedestrian subways, etc.) as well as public spaces and buildings requiring reinforced protection, Urbaline make it possible to provide precise illumination while reducing energy consumption, thanks to its latest-generation LLC1300 LED modules.

Lighting management is optimized via optional functions like DALI dimming, switch dimming, and detection with warning and standby (consumption less than 0.5 W in standby).

Recyclable and employing recycled materials, it is upgradeable thanks to its plug-in repairable components.

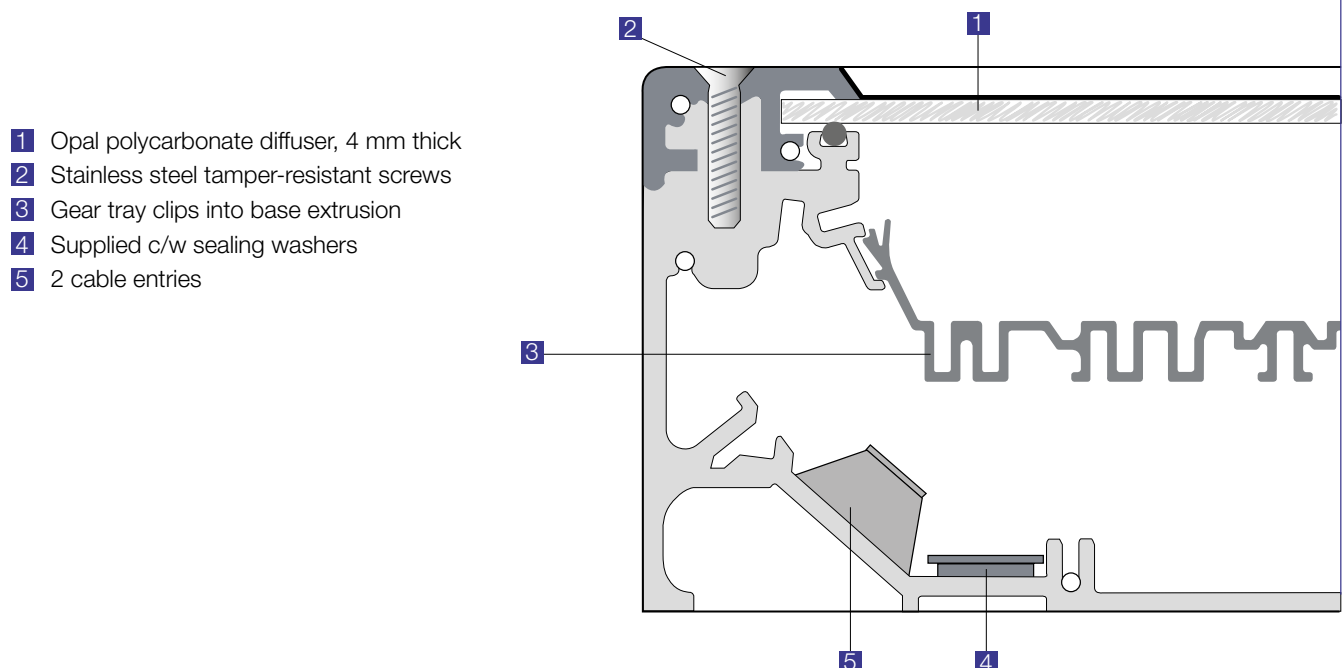



URBALINE




An elegant luminaire designed to withstand marine corrosion and extreme vandalism in public spaces and railway premises.



Urbaline



Urbaline Angle



Features:



- Body: 4 mm thick marine-grade 6060 aluminium
- Qualanod 20 µ anodizing
- Reinforced end caps in PC (50 joules) or aluminium (150 joules)
- Opal polycarbonate diffuser
- Linear LED module
- Stainless steel vandal-resistant screws

Options available on request:

- Version with emergency pack
- 3000 K LEDs
- Light-control optics version

Applications:

- Public transport infrastructures (stations, pedestrian subways, etc.)
- Public spaces and buildings requiring increased protection

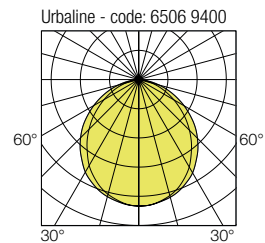

Vandal-resistant tool (bit) to be ordered separately
code: 9800 0003




60° LED Optics



90° LED Optics

LED optics version on request

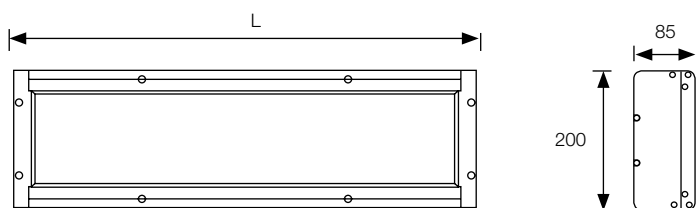

URBALINE LED (wall mounting)

i direct 650

220-240 V AC / 50/60 Hz RoHS

Number of LLC 1300 modules	Length L (mm)	Length with detection L (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	CCT (K) (CRI min.)	Code 50 J	Code 150 J
1	370	435	13	985	76	4000 (80)	6500 94..	6530 94..
2	650	715	25	1969	79	4000 (80)	6501 94..	6531 94..
3	930	995	35	2788	80	4000 (80)	6502 94..	6532 94..
4	1210	1275	47	3689	79	4000 (80)	6503 94..	6533 94..
2 x 1	370	435	25	1969	79	4000 (80)	6504 94..	6534 94..
2 x 2	650	715	47	3689	79	4000 (80)	6505 94..	6535 94..
2 x 3	930	995	71	5576	79	4000 (80)	6506 94..	6536 94..
2 x 4	1210	1275	80	6297	79	4000 (80)	6507 94..	6537 94..

Coding:

replace the two dashes (--) by the corresponding figures: e.g. 6500 94 ..


- 00 no detection
- 21 DALI dimmable + switch dimming + standby warning
- 12 with Pro detection
- 14 with Pro detection + extinction warning
- 15 with Pro detection + standby warning
- 16 with Pro detection + radio-control
- 04 slave version + extinction warning
- 05 slave version + stand-by warning

Additional options Urbaline wall-mounting

Coding:

add the corresponding suffix to the product code: e.g. 6500 9400

- 9702 stainless steel crosspoint screws (VK54)

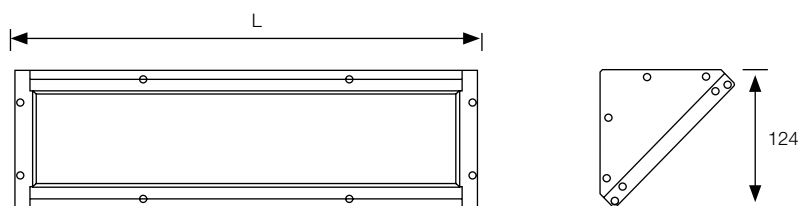

URBALINE LED (angle)

i direct 660

220-240 V AC / 50/60 Hz RoHS

Number of LLC 1300 modules	Length L (mm)	Length with detection L (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	CCT (K) (CRI min.)	Code 50 J	Code 150 J
1	370	435	13	985	76	4000 (80)	6600 94..	6630 94..
2	650	715	25	1969	79	4000 (80)	6601 94..	6631 94..
3	930	995	35	2788	80	4000 (80)	6602 94..	6632 94..
4	1210	1275	47	3689	79	4000 (80)	6603 94..	6633 94..
2 x 1	370	435	25	1969	79	4000 (80)	6604 94..	6634 94..
2 x 2	650	715	47	3689	79	4000 (80)	6605 94..	6635 94..
2 x 3	930	995	71	5576	79	4000 (80)	6606 94..	6636 94..
2 x 4	1210	1275	80	6297	79	4000 (80)	6607 94..	6637 94..

Coding:

replace the two dashes (--) by the corresponding figures: e.g. 6600 94 ..

- 00 no detection
- 21 DALI dimmable + switch dimming + standby warning
- 12 with Pro detection
- 14 with Pro detection + extinction warning
- 15 with Pro detection + standby warning
- 16 with Pro detection + radio-control
- 04 slave version + extinction warning
- 05 slave version + stand-by warning

Additional options Urbaline angle

Coding:

add the corresponding suffix to the product code: e.g. 6600 9400 ----

- 9702 stainless steel crosspoint screws (VK54)



Suzhou North Railway Station

