

Sounder AX03, AX05

**Loud signalling device
with 32 different signals**

- ▶ AC and DC versions
- ▶ High volume up to 112 dB(A)
- ▶ Low current consumption
- ▶ Choice of 32 different signal tones
- ▶ Steady frequency rate
- ▶ Robust and reliable



Application

The Yodalarm sounders are loud, compact signalling devices with good directivity.

Their IP 66 housings qualify them for use both indoors and outdoors.

Design

The housing consists of ABS.

The sounders are equipped with 32 different tones and are therefore suitable for universal use.

The Sounders are available in AC and DC version. Both versions are designed for a two-stage alarm.





**Signalling
devices with
good directivity**

for use indoors and
outdoors.



Technical specifications

Housing	ABS		
Colour	red		
Protection degree	IP 66 (IEC 60529)		
Cable gland	knochouts		
Volume	approx. 100-112 dB(A) (AX05 adjustable)		
Signals	32 different signal tones		
Temperature range	-25 °C to +70 °C		
Weight		AC	DC
	AX03	0.4 kg	0.3 kg
	AX05	0.7 kg	0.5 kg

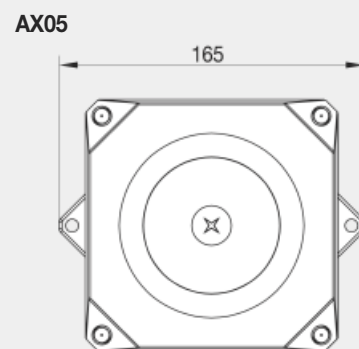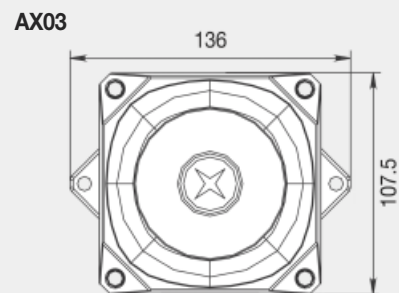

Order information

Type	Name	Rated voltage V	Operating voltage range V	Volume dB(A)	Article no.
AX03	Sounder	115/230 VAC	115 - 230 V	100 - 111	215 310 07
AX03	Sounder	12/24 VDC	9 - 60 V	100 - 111	215 310 13
AX05	Sounder	115/230 VAC	115 - 230 V	109 - 112	215 320 07
AX05	Sounder	12/24 VDC	9 - 60 V	109 - 112	215 320 13

Subject to change without notice · Printout 09/13



Sounder AX08

**Loud signalling device
with 42 different signals**

- ▶ AC and DC versions
- ▶ High volume up to 120 dB(A)
- ▶ Low current consumption
- ▶ Choice of 42 different signal tones
- ▶ Steady frequency rate
- ▶ Sturdy and reliable

Application

The Avisaline sounders are loud, compact signalling devices with good directivity.

Their IP 66 housings qualify them for use both indoors and outside.

Design

The housing consists of ABS. The sounders are equipped with 42 different tones and are therefore suitable for universal use.

The Sounders are available in AC and DC version. Both versions are designed for a 3-stage alarm.



**Signalling
devices with
good directivity**

for use indoors and
outside.



Technical specifications

Housing	ABS		
Colour	red		
Protection degree	IP 66 (IEC 60529)		
Cable gland	knockouts		
Volume	approx. 105 - 120 dB(A) adjustable (depending on signal tone)		
Signals	42 different signal tones 3 tones extern swichable		
Temperature range	-25 °C to +70 °C		
Weight		AC	DC
	AX08	2.5 kg	1.6 kg



Order information

Type	Name	Rated voltage V	Operating voltage range V	Current consumption A	Volume dB(A)	Article no.
AX08	Sounder	115 / 230 VAC	115 or 230 V	0.1	105 - 120	215 330 07
AX08	Sounder	24 VDC	18 - 28 V	0.45	105 - 120	215 330 13

Subject to change without notice · Printout 09/13